

REBLOC 100H_2

Standard element



tested according to EN1317-1/2

Application
Permanent system


Installation
Free standing



Containment level **H3** (covers H2, H1, N1, T3, T2 and T1)
 Working width **W6** (covers W7 and W8)
 Impact severity level **ASI B**

Product features & Advantages

- Narrow curve radius due to short element length of 2 m
- Efficient solution for crossovers in the central reservation
- Easy and quick opening of the continuous element chain

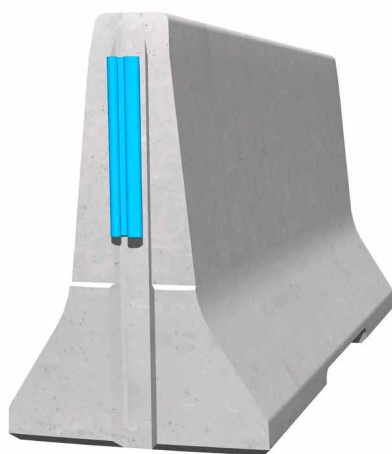

With an element length of just 2 m, the REBLOC 100H_2 successfully passed the TB61 (crash test according to EN1317-2) and withstood an impact of a 16 t truck driving at 80 km/h. The system thus meets the high specifications of containment level H3. Besides the realisation of a narrow curve radius, the system is ideal for temporary crossovers in the central reservation.

Breakthroughs onto the opposite carriageway are prevented and vehicle deviating from the road are retained or redirected.

The integrated, innovative coupling does not contain any loose parts. An unauthorized removal of pieces is prevented and protects fully against vandalism. Additionally, the installation speed is increased as well. The easy installation, which does not depend on weather conditions, reduces the disruptions of the traffic flow.


REBLOC 100H_2

Standard element



tested according to EN1317-1/2

Technical data

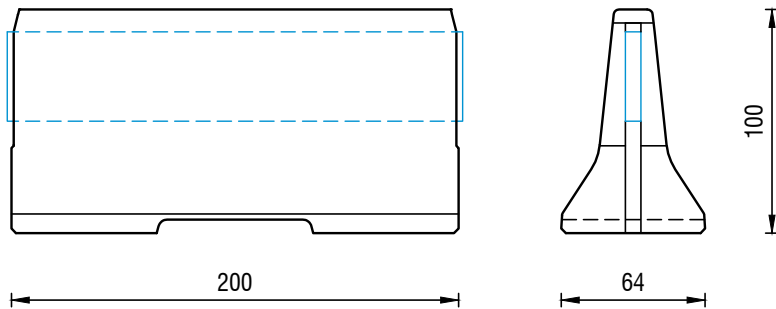

all dimensions in cm

| | |
|------------------------------|--|
| Containment level | H3 |
| Working width | W6 |
| Impact severity level | ASI B |
| Vehicle intrusion | VI9 |
| Installation | free standing on asphalt/concrete |
| Terminal elements | REBLOC 100_4T (4 x M24 adhesive anchor) |
| Dimensions L x W x H in cm | 200 x 64 x 100 cm |
| Weight/element | 1.500 kg |
| Elements/truck (24 t) | 16 elements |
| Minimum installation length | 76 m (not including terminal elements) |
| Curve radius | $r \geq 27$ m |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| CE certification | ✓ |

System element - combinable



Terminal element
REBLOC 100_4T
(inclination 1:5)