


# TRANSITION

## Vario Transition REBLOC 80H



REBLOC 80H\_8 <>  
STRABAG TSS Jerseybaer H2


tested according to ENV1317-4

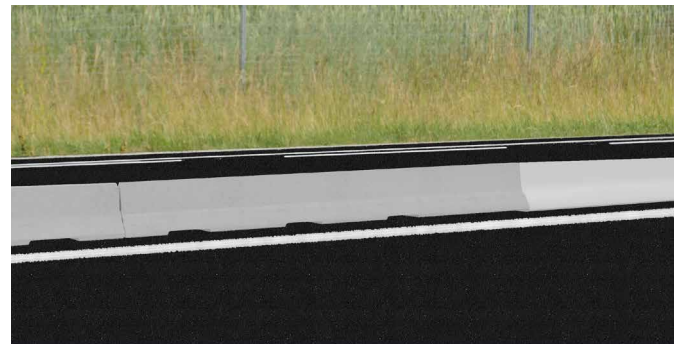

Containment level **H2**  
Working width **W2**  
Impact severity level **ASI B**

### Product features & Advantages

- Transition tested according to ENV 1317-4
- Transition in both directions of traffic flow possible
- Consisting of one precast concrete element REBLOC 80H\_JB90\_8L/R and one reinforced in-situ concrete barrier section with 2 m length

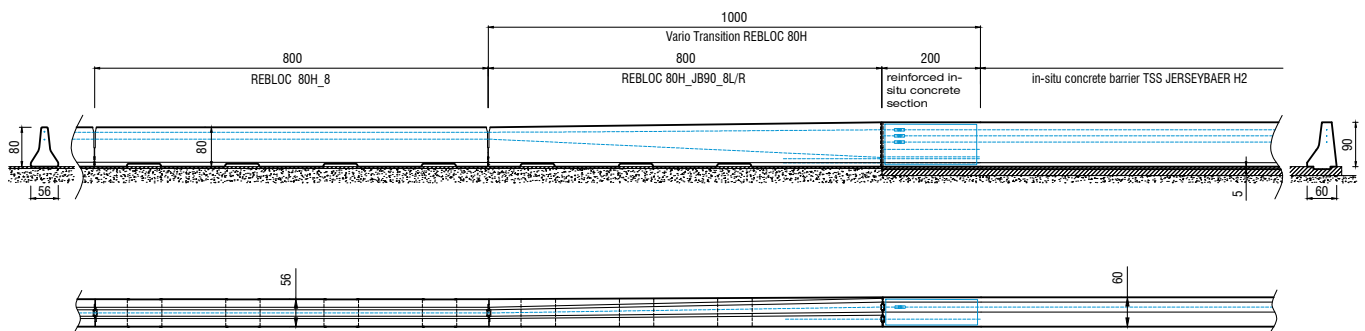

all dimensions in cm

### Technical data

Weight REBLOC 80H_JB90_8L/R	5.030 kg
Total length	10 m
Coupling/exposed steel parts precast concrete element	fully integrated, exposed parts hot-dip galvanized