

# REBLOC 80SAQ\_12

Standard element

anchored:	<b>N2</b>	<b>W1</b>	free standing: <sup>1)</sup>	<b>T3</b>	<b>W2</b>
	free standing: <sup>1)</sup>	<b>N2</b>	<b>W3</b>	free standing: <sup>1)</sup>	<b>H1</b>
					<b>W4</b>

tested according to EN1317-1/2

Application  
**Temporary system**


Installation  
**Anchored in asphalt**



Containment level	<b>N2</b> (covers N1, T2, T1)
Working width	<b>W1</b> (covers W2, W3, W4, W5, W6, W7 and W8)
Impact severity level	<b>ASI B</b>

## Product features & Advantages

- High protection of construction sites and traffic lanes due to very low working width W1
- High installation speed: easy and quick installation, relocation and removal
- Reflectors on both sides for guidance, increasing safety & awareness of road users

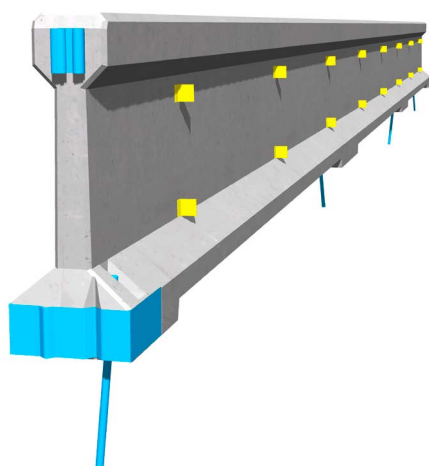

REBLOC® Temporary Systems ensure smooth traffic flow in congested areas. Traffic is separated from construction zones and protects personnel and site machinery from vehicle impact and traffic related incidents.

The REBLOC 80SAQ\_12 is ideal for narrow road widths. The slim system width of 30 cm and the low working width W1 are important determinants, if little space is available. Each element is anchored with only 4 anchor pins, which can be easily installed and removed.

The interlocking coupling not including loose parts prevents unauthorized removal of pieces and protects against vandalism.

The large contact areas with integrated rubber pads result in a low surface pressure and protect the road surface.


The system is also available free standing with T3/W2, N2/W3 und H1/W4.

<sup>1)</sup> details see datasheet REBLOC 80SAQ\_12\_T3/W2|N2/W3|H1/W4

# REBLOC 80SAQ\_12

Standard element

## Technical data

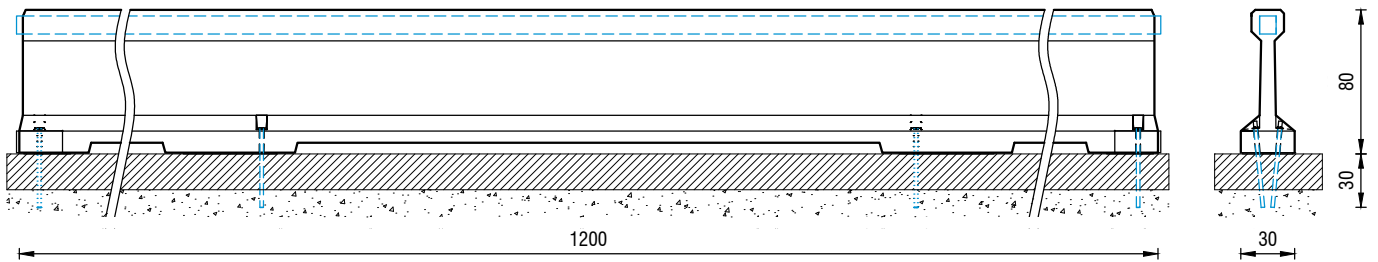

all dimensions in cm

Containment level	N2
Working width	W1
Impact severity level	ASI B
Installation	anchored in asphalt (4 x anchor pins REPIN20_480 per element)
Terminal elements	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 80 cm
Weight/element	3000 kg
Elements/truck (24 t)	8 elements
Minimum installation length	120 m
Curve radius	$r \geq 260$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE-certification	✓
Features	rubber pads in contact areas for protection of the road surface
Further application	The system can also be installed free standing with performance data T3/W2, N2/W3 and H1/W4.

## System element - combinable (optional)



Terminal element  
REBLOC 80S\_4T\_S37  
(inclination 1:5)

<sup>1)</sup> details see datasheet REBLOC 80SAQ\_12\_T3/W2|N2/W3|H1/W4