

REBLOC 80XAS_8 (T3) REBLOC 80XAS_8_4P (H2)

Standard element

T3	W2
H2	W3 ¹⁾

tested according to EN1317-1/2

Application
Temporary/Permanent

Installation
Free standing/Anchored soil



Containment level	T3 (covers T2 and T1)
Working width	W2 (covers W3, W4, W5, W6, W7 and W8)
Containment level	H2 (covers H1 and N1)
Working width	W3 (covers W4, W5, W6, W7 and W8)
Impact severity level	ASI A (T3), ASI B (H2)



Product features & Advantages

- **REBLOC SWITCH®:** Application directly during construction site and later as permanent system
- Usage on central reservation and along the verge
- Installation on asphalt and compacted soil possible



The cost-efficient REBLOC 80XAS_8 offers the possibility to use one system for two applications: containment level T3 for protection of the construction site as well as containment level H2 for permanent protection.

The temporary system is free standing, separates the traffic lanes and offers protection for the construction sites and road workers.

The high safety protection of the permanent system is reached by the anchor pins. Even with the high containment level H2 a low working width level of W3 is achieved. The installation is carried out on compacted soil and no additional foundation is necessary. Additionally, an installation is possible on asphalt/concrete.

¹⁾ based on a modification in accordance to EN1317-5


REBLOC 80XAS_8 (T3) REBLOC 80XAS_8_4P (H2)

Standard element



tested according to EN1317-1/2


Technical data

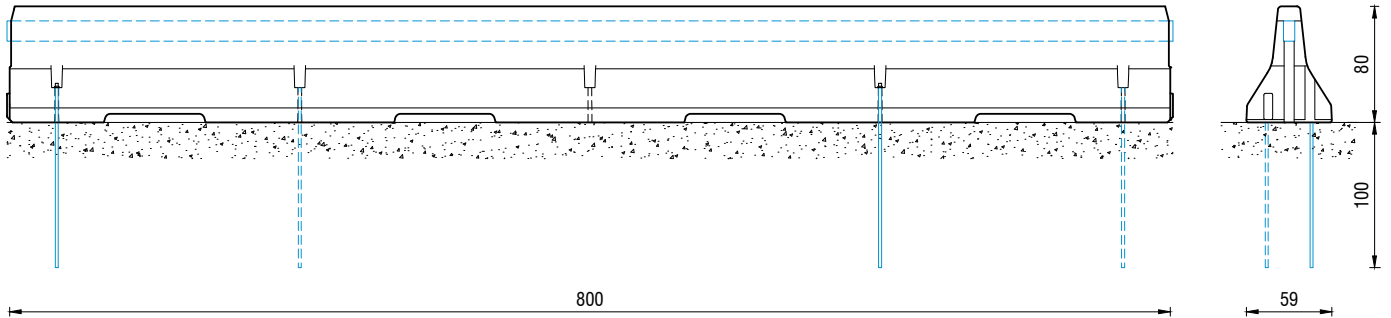

all dimensions in cm

Containment level	T3	H2
Working width	W2	W3
Impact severity level	ASI A	ASI B
Vehicle intrusion	VI1	VI3
Installation	free standing	anchored soil (4 x anchor pins REPIN20_1280 in compacted soil per element)
Terminal elements	not necessary, optional available	required; REBLOC 80X_4T (2 x anchor pins REPIN20_1280 in compacted soil per element)
Dimensions L x W x H in cm	800 x 59 x 80 cm	
Weight/element	4.800 kg	
Elements/truck (24 t)	5 elements	
Minimum installation length	80 m (not including terminal elements)	64 m (not including terminal elements)
Curve radius	$r \geq 250$ m, smaller radii on request	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	
CE certification	✓ (H2/W3)	

System elements - combinable



Terminal element
REBLOC 80X_4T
(inclination 1:5)

¹⁾ based on a modification in accordance to EN1317-5

REBLOC GmbH

Wiener Straße 662 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901
office@rebloc.com

www.rebloc.com