

TRANSITION REBLOC 80H_8 <> KB2 RH2C

Transition for pile driving ground




tested according to ENV1317-4



Containment level	H2 (covers H1, N1, T3, T2 and T1)
Working width	W5 (covers W6, W7 and W8)
Impact severity level	ASI A

Product features & Advantages

- Transition tested according to ENV 1317-4
- Transition from steel system KB2 RH2C to REBLOC 80H_8 in both directions of traffic flow possible
- Composed of steel construction KB2 RH2C and one precast concrete element REBLOC 80X_3.75V and one element 80X_80H_8V

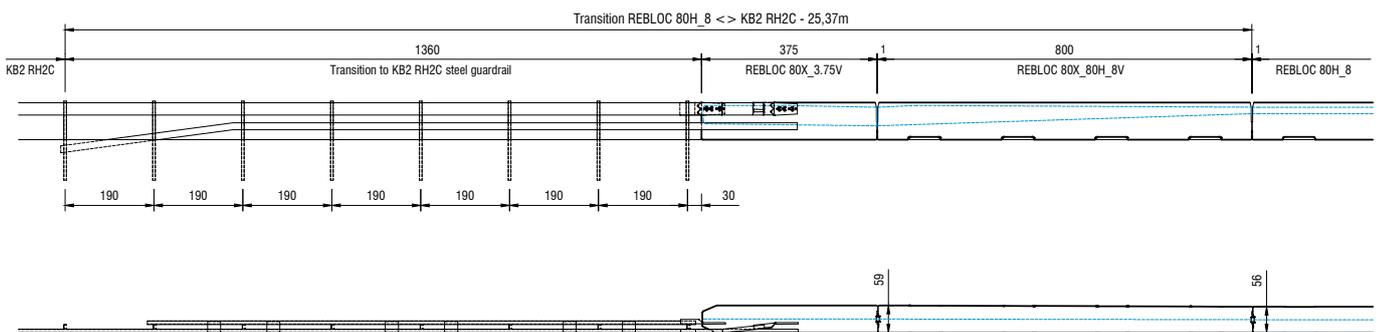

Technical data

Weight REBLOC 80X_3.75V	2.280 kg
Weight REBLOC 80X_80H_8V	4.400 kg
Total length	25,37 m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

REBLOC GmbH

Wiener Straße 662 · 3571 Gars/Kamp · Austria
 Tel.: +43 (0) 2985 30528 2900
 Fax: +43 (0) 2985 30528 2901
 office@rebloc.com