



MINIBLOC 50_1



Concrete element for securement of urban and industrial areas

not tested according to EN1317


Technical data

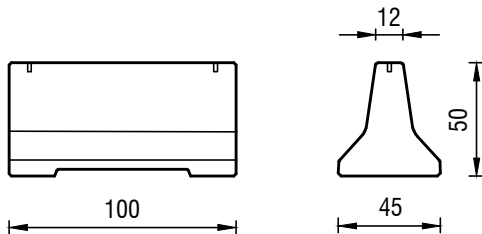


all dimensions in cm

Installation	free standing
Dimensions L x W x H in cm	100 x 45 x 50 cm
Weight/element	260 kg
Lifting possibility	Anchor loop RD16, belts in drainage openings or forklift
Application	<p>Ideal for the securement of:</p> <ul style="list-style-type: none"> ➢ Parking and storage locations ➢ Sidewalks and cycle paths ➢ Traffic islands, entrances and exit gates ➢ Fall protection for slopes and path limitation ➢ Events
Additional equipment	<ul style="list-style-type: none"> ➢ Railing (height 50 cm, approx. 4 kg) ➢ Connecting chain or strap ➢ Various reflectors ➢ Attachment for traffic signs, fence, etc.


Further MINIBLOC elements



MINIBLOC 50_2
Standard element



MINIBLOC 50_2T
Terminal element
(inclination 1:5)



MINIBLOC 50_BS
Bollard square



MINIBLOC 50_C90
Corner element



REBLOC GmbH

Wiener Straße 662 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901
office@rebloc.com

www.rebloc.com