



# MINIBLOC 50\_2

Concrete element for securement of urban and industrial areas



not tested according to EN1317


## Technical data

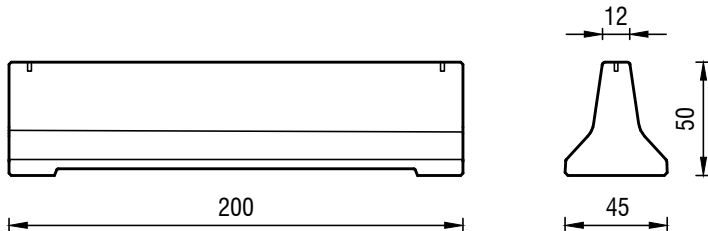


all dimensions in cm

Installation	free standing
Dimensions L x W x H in cm	200 x 45 x 50 cm
Weight/element	530 kg
Lifting possibility	Anchor loop RD16, belts in drainage openings or forklift
Application	<p>Ideal for the securement of:</p> <ul style="list-style-type: none"> <li>➢ Parking and storage locations</li> <li>➢ Sidewalks and cycle paths</li> <li>➢ Traffic islands, entrances and exit gates</li> <li>➢ Fall protection for slopes and path limitation</li> <li>➢ Events</li> </ul>
Additional equipment	<ul style="list-style-type: none"> <li>➢ Railing (height 50 cm, approx. 7,5 kg)</li> <li>➢ Connecting chain or strap</li> <li>➢ Various reflectors</li> <li>➢ Attachment for traffic signs, fence, etc.</li> </ul>


## Further MINIBLOC elements



MINIBLOC 50\_1  
Standard element



MINIBLOC 50\_2T  
Terminal element  
(inclination 1:5)



MINIBLOC 50\_BS  
Bollard square



MINIBLOC 50\_C90  
Corner element



## REBLOC GmbH

Wiener Straße 662 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901  
office@rebloc.com

[www.rebloc.com](http://www.rebloc.com)