


ECOBLOC 100_2



Concrete element with integrated coupling
for securement of urban and industrial areas

not tested according to EN1317

Technical data

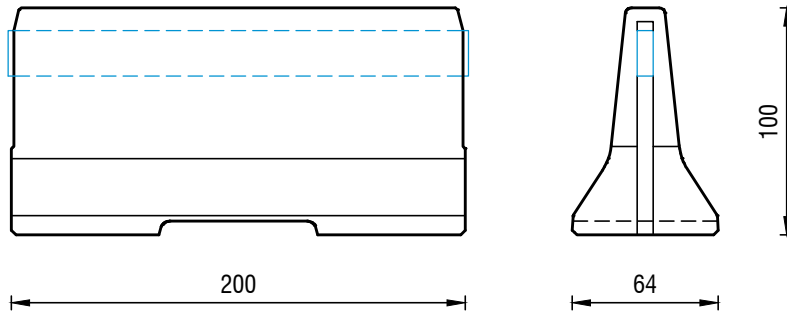

all dimensions in cm

Installation	free standing
Dimensions L x W x H in cm	200 x 64 x 100 cm
Weight/element	1.500 kg
Curve radius	$r \geq 27$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Lifting possibility	REBLOC® gripping tongs, belts in drainage openings or forklift
Application	<p>Ideal for the securement of:</p> <ul style="list-style-type: none"> ➤ Parking and storage locations ➤ Sidewalks and cycle paths ➤ Traffic islands, entrances and exit gates ➤ Fall protection for slopes and path limitation ➤ Events
Additional equipment	<ul style="list-style-type: none"> ➤ Railing (height 50 cm, approx. 7,5 kg) ➤ Various reflectors

Further ECOBLOC elements



ECOBLOC 80_2
Standard element



ECOBLOC 80_4
Standard element



ECOBLOC 100_4
Standard element



REBLOC GmbH

Wiener Straße 662 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901
office@rebloc.com

www.rebloc.com