

# REBLOC 50H\_12


## Technical Datasheet

ASI B

REBLOC 50H\_12


Precast Concrete  
Vehicle Restraint System

Temporary System  
Free standing



### Technical data

Containment level	H1
Working width	W8 ( $W_N \leq 3.5$ m)
Impact severity level	ASI B
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	156 m (13 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 50H_2T or force closure
Dimensions L x W x H in cm	1200 x 24 x 50 cm
Weight/element	approx. 1580 kg
Curve radius	$r \geq 200$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	✓

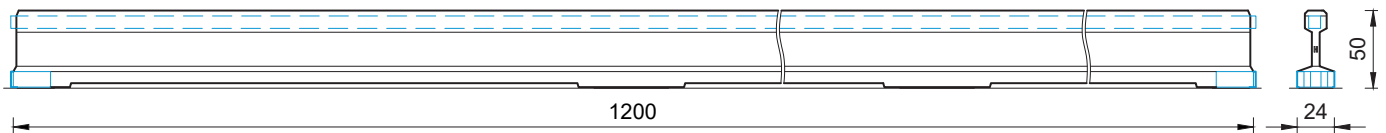

all dimensions in cm

### REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)