

REBLOC 80L_8

Technical Datasheet

ASI B


REBLOC 80L_8

Precast Concrete
Vehicle Restraint System

Permanent System
Free standing

**Technical data**

| | |
|------------------------------|--|
| Containment level | H1 |
| Working width | W5 ($W_N \leq 1.7$ m) |
| Impact severity level | ASI B |
| Vehicle intrusion | VI4 ($VI_N \leq 1.3$ m) |
| Installation | free standing on asphalt concrete |
| Application | single-sided double-sided |
| Minimum installation length | 80 m (10 elements) + initial/end anchorage |
| Initial/end anchorage | required (according to anchor chart 39-10501): e.g. REBLOC 80H_4T 80H_7T or force closure |
| Dimensions L x W x H in cm | 800 x 56 x 80 cm |
| Weight/element | approx. 3880 kg |
| Curve radius | $r \geq 110$ m, smaller radii on request |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| CE certification | ✓ |

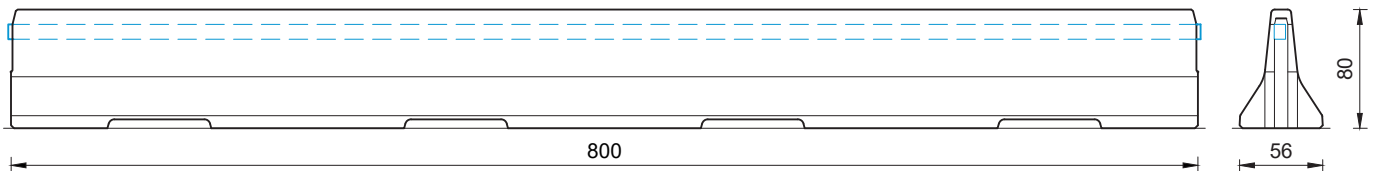

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com