


REBLOC 80SAQ_12

Technical Datasheet


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

	H1	N2	T3
Containment level			
Working width	W4 ($W_N \leq 1.3$ m)	W3 ($W_N \leq 1.0$ m)	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B	ASI B	ASI B
Installation	free standing on asphalt concrete		
Application	single-sided double-sided		
Minimum installation length	120 m (10 elements) + initial/end anchorage	108 m (9 elements) + initial/end anchorage	120 m (10 elements)
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure		not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 80 cm		
Weight/element	approx. 2980 kg		
Curve radius	$r \geq 260$ m, smaller radii on request		
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized		
Features	rubber pads in contact areas for protection of the road surface		
CE certification	✓ (H1 N2)		

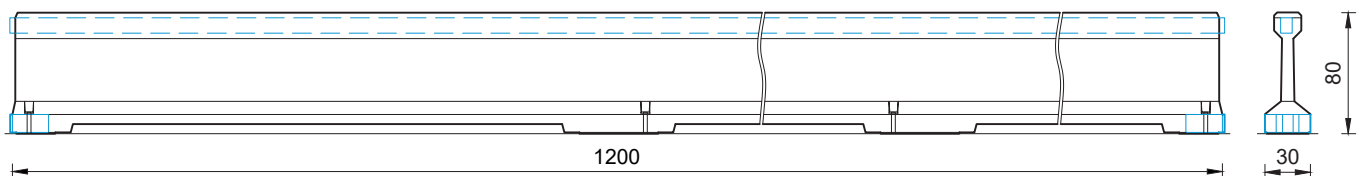

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com