


REFENCE 80H_8+124.02

Technical Datasheet

ASI B

**Precast Concrete
Vehicle Restraint System
with integrated fence**


**Temporary System
Permanent System
Free standing**

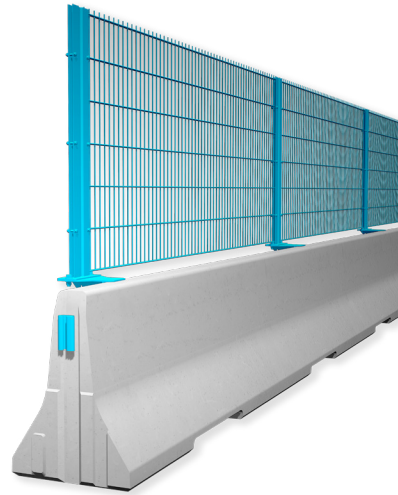

REFENCE 80H_8+124.02

Technical data

Containment level	H1
Working width	W5 ($W_N \leq 1.7$ m)
Impact severity level	ASI B
Vehicle intrusion	VI4 ($VI_N \leq 1.3$ m)
Installation	free standing on asphalt concrete
Application	single-sided
Minimum installation length	80 m (10 concrete elements) + end anchorage
End anchorage	required (according to anchor chart): e.g. REBLOC 80H_4T or force closure
Dimensions L x W x H in cm	800 x 56 x 205 cm (height concrete element 80 cm + height top fence 124 cm + height bracket plate 1 cm)
Weight/element	4060 kg (concrete element)
Curve radius	$r \geq 225$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

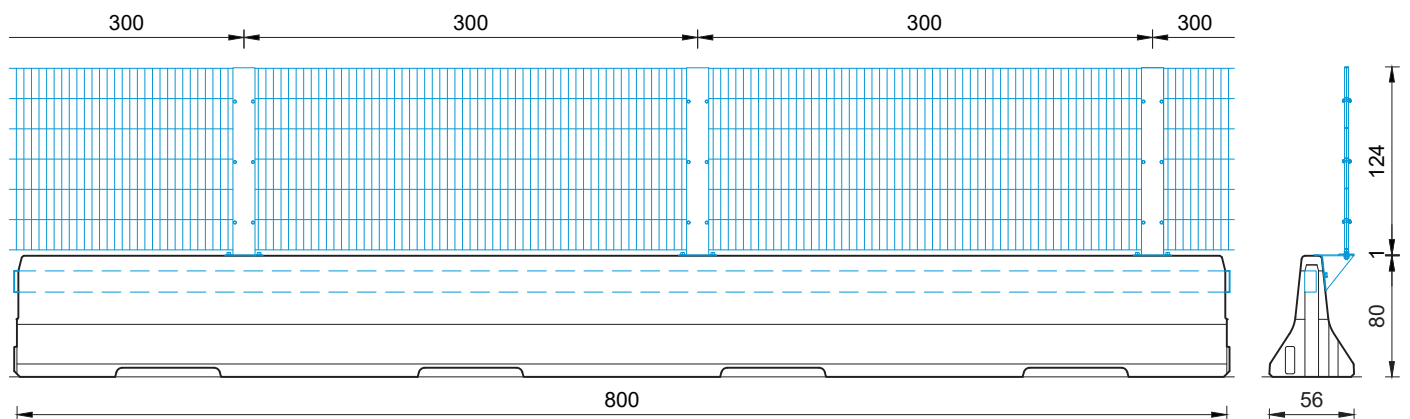

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com www.rebloc.com