

# REBLOC 100H\_3

## Technical Datasheet

ASI B

REBLOC 100H\_3


Precast Concrete  
Vehicle Restraint System

Permanent System  
Free standing



### Technical data

Containment level	H3
Working width	W6 ( $W_N \leq 2.1$ m)
Impact severity level	ASI B
Vehicle intrusion	VI9 ( $VI_N > 3.5$ m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	78 m (26 elements) + initial/endend anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 100_4T or force closure
Dimensions L x W x H in cm	300 x 64 x 100 cm
Weight/element	approx. 2300 kg
Curve radius	$r \geq 40$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

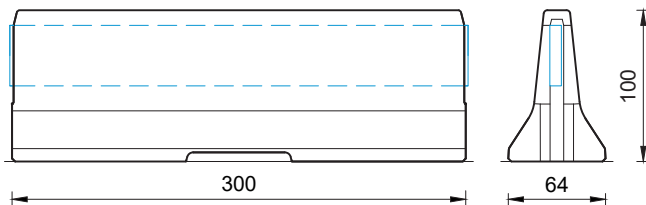

all dimensions in cm

### REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)