

REBLOC 100H_4

Technical Datasheet

ASI B

REBLOC 100H_4


Precast Concrete
Vehicle Restraint System

Permanent System
Free standing



Technical data

Containment level	H3
Working width	W6 ($W_N \leq 2.1$ m)
Impact severity level	ASI B
Vehicle intrusion	VI9 ($VI_N > 3.5$ m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	76 m (19 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 100_4T or force closure
Dimensions L x W x H in cm	400 x 64 x 100 cm
Weight/element	approx. 3030 kg
Curve radius	$r \geq 55$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

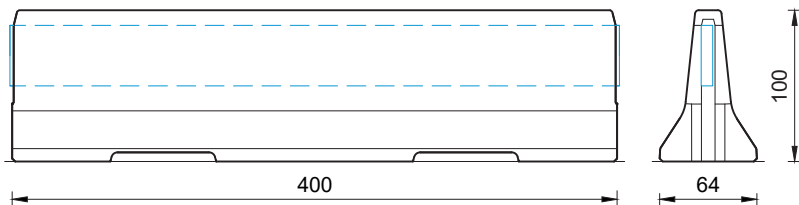

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com