

**REBLOC 100L\_8**

## Technical Datasheet

ASI B


REBLOC 100L\_8

Precast Concrete  
Vehicle Restraint System

Permanent System  
Free standing

**Technical data**

Containment level	H2
Working width	W5 ( $W_N \leq 1.7$ m)
Impact severity level	ASI B
Vehicle intrusion	VI5 ( $VI_N \leq 1.7$ m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	80 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 100_4T or force closure
Dimensions L x W x H in cm	800 x 64 x 100 cm
Weight/element	approx. 5980 kg
Curve radius	$r \geq 110$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

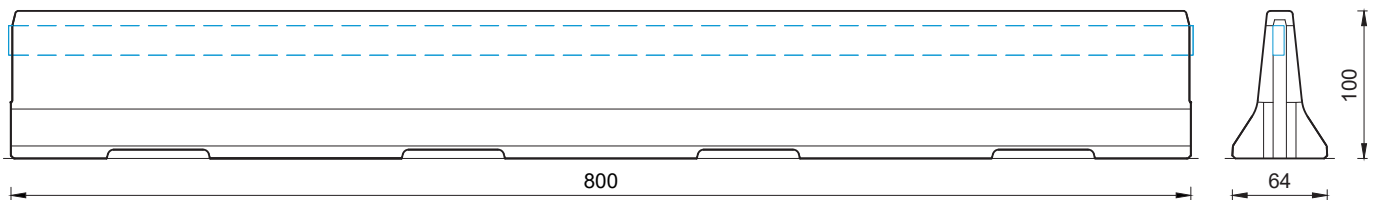

all dimensions in cm

**REBLOC GmbH**

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)