

**REBLOC 100L\_8**

## Technical Datasheet

ASI B


REBLOC 100L\_8

Precast Concrete  
Vehicle Restraint System

Permanent System  
Free standing

**Technical data**

|                              |                                                                                       |
|------------------------------|---------------------------------------------------------------------------------------|
| Containment level            | H3                                                                                    |
| Working width                | W5 ( $W_N \leq 1.7$ m)                                                                |
| Impact severity level        | ASI B                                                                                 |
| Vehicle intrusion            | VI8 ( $VI_N \leq 3.5$ m)                                                              |
| Installation                 | free standing on asphalt   concrete                                                   |
| Application                  | single-sided   double-sided                                                           |
| Minimum installation length  | 80 m (10 elements) + initial/end anchorage                                            |
| Initial/end anchorage        | required (according to anchor chart 39-10501):<br>e.g. REBLOC 100_4T or force closure |
| Dimensions L x W x H in cm   | 800 x 64 x 100 cm                                                                     |
| Weight/element               | approx. 5980 kg                                                                       |
| Curve radius                 | $r \geq 110$ m, smaller radii on request                                              |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized                                    |
| CE certification             | ✓                                                                                     |

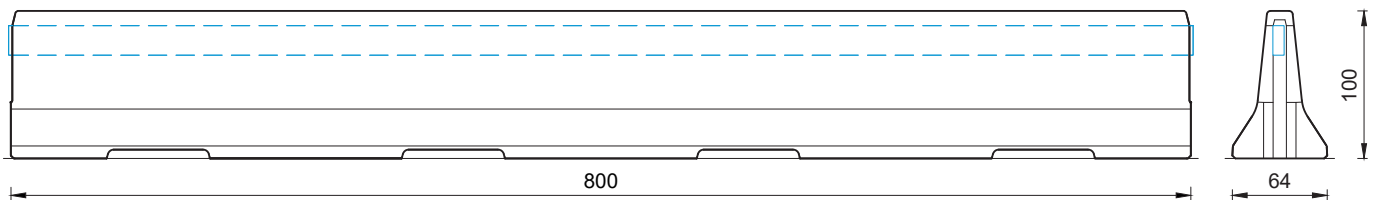

all dimensions in cm

**REBLOC GmbH**

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)