

**REBLOC 100\_8**

Technical datasheet

ASI B


REBLOC 100\_8

Precast Concrete  
Vehicle Restraint System

Permanent System  
Free standing

**Technical data**

|                              |   |
|------------------------------|---|
| Containment level            | H2  |
| Working width                | W5 ( $W_N \leq 1.7$ m)  |
| Impact severity level        | ASI B   |
| Vehicle intrusion            | VI5 ( $VI_N \leq 1.7$ m)  |
| Installation                 | free standing on asphalt   concrete   |
| Application                  | single-sided   double-sided   |
| Minimum installation length  | 104 m (13 elements) + initial/end anchorage   |
| Initial/end anchorage        | required (according to anchor chart 39-10501):<br>e.g. REBLOC 100_4T or force closure |
| Dimensions L x W x H in cm   | 800 x 64 x 100 cm   |
| Weight/element               | approx. 6010 kg   |
| Curve radius                 | $r \geq 110$ m, smaller radii on request  |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized                                    |
| CE certification             | ✓   |

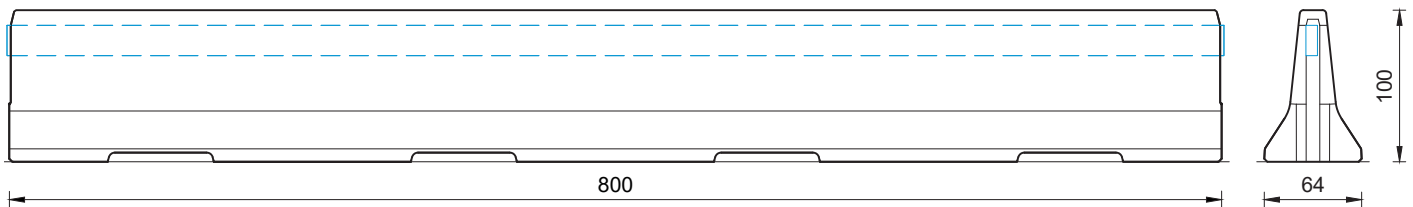

all dimensions in cm

**REBLOC GmbH**

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com [www.rebloc.com](http://www.rebloc.com)