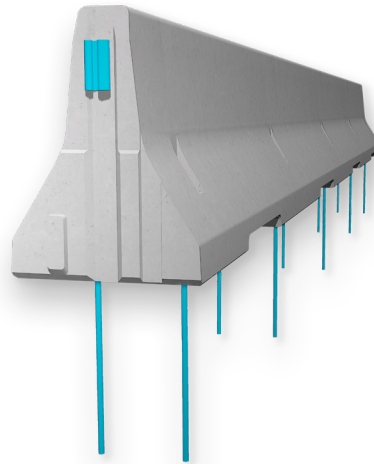


# REBLOC 80XAS\_8\_10P


Technical Datasheet

ASI B

REBLOC 80XAS\_8\_10P

**Precast Concrete  
Vehicle Restraint System****Permanent System  
Anchored****Technical data**

Containment level	H2
Working width	W2 ( $W_N \leq 0.8 \text{ m}$ )
Impact severity level	ASI B
Vehicle intrusion	VI2 ( $VI_N \leq 0.8 \text{ m}$ )
Installation	anchored in compacted soil   asphalt   concrete (per element 10 x anchor pins RPIN20_1280)
Application	single-sided   double-sided
Minimum installation length	64 m (8 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 59 x 80
Weight/element	approx. 4620 kg
Curve radius	$r \geq 235 \text{ m}$ , smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

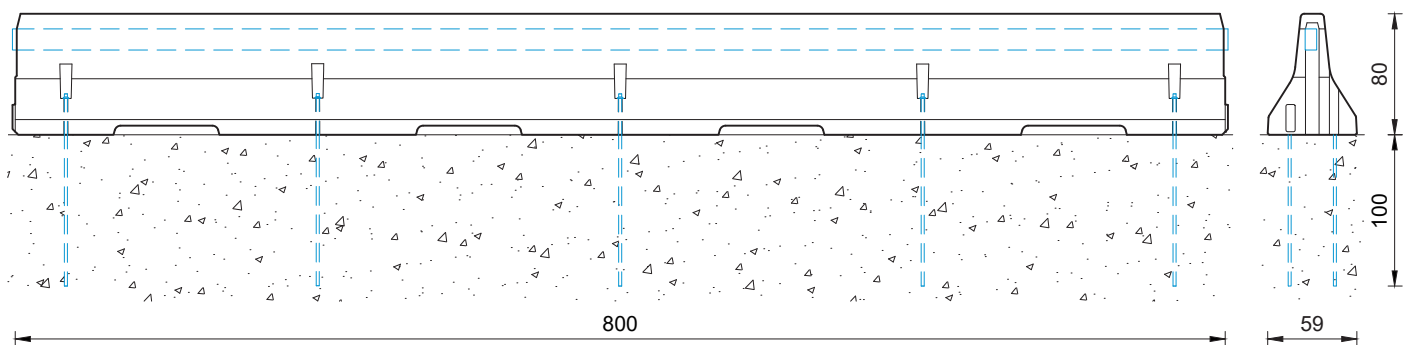

all dimensions in cm