

REBLOC 80XAS_8_4P


Technical Datasheet

ASI B


REBLOC 80XAS_8_4P

**Precast Concrete
Vehicle Restraint System**

**Permanent System
Anchored**

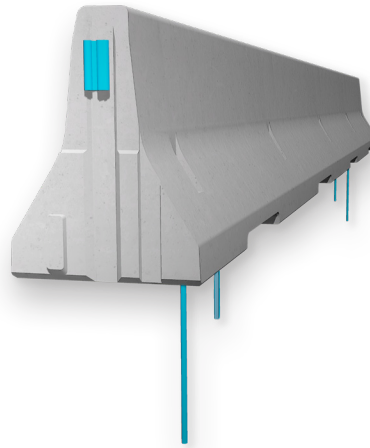**Technical data**

Containment level	H2
Working width	W3 ($W_N \leq 1.0$ m)
Impact severity level	ASI B
Vehicle intrusion	VI3 ($VI_N \leq 1.0$ m)
Installation	anchored in compacted soil (per element 4 x anchor pins RPIN20_1280)
Application	single-sided double-sided
Minimum installation length	64 m (8 elements) + initial/end anchorage
Initial/end anchorage	required: e.g. REBLOC 80X_4T (2 x anchor pins RPIN20_1042 oder 1280) or force closure
Dimensions L x W x H in cm	800 x 59 x 80
Weight/element	approx. 4620 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

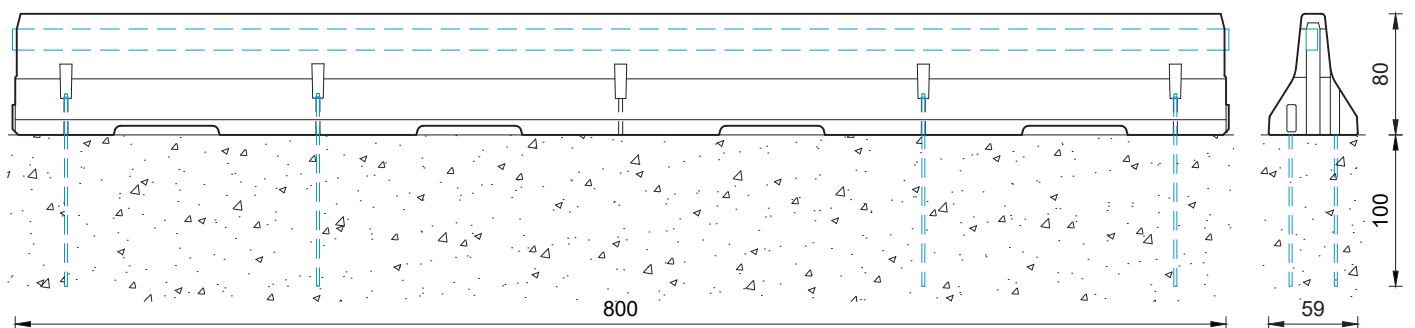

all dimensions in cm