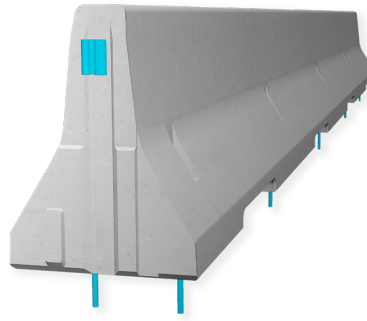


REBLOC 80XA_8_10A


Technical Datasheet

ASI B

REBLOC 80XA_8_10A

**Precast Concrete
Vehicle Restraint System****Permanent System
Anchored****Technical data**

Containment level	L2 / H2
Working width	W1 ($W_N \leq 0.6$ m)
Impact severity level	ASI B
Vehicle intrusion	VI1 ($VI_N \leq 0.6$ m)
Installation	anchored in asphalt concrete (per element 10 x adhesive anchors M20)
Application	single-sided double-sided
Minimum installation length	32 m (4 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 59 x 80 cm
Weight/element	approx. 4620 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

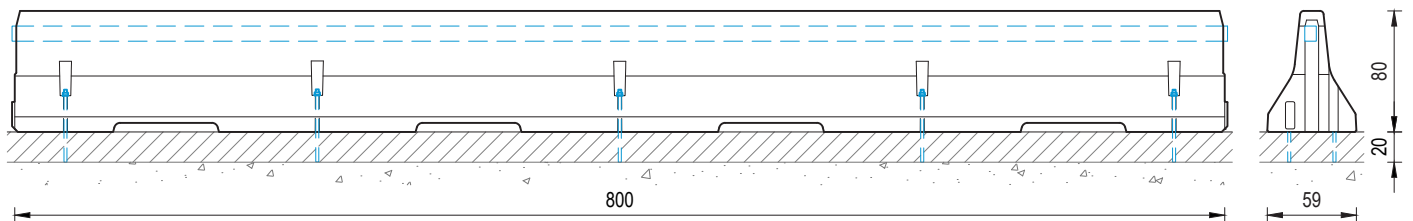

all dimensions in cm