

REBLOC 80XW_8

Technical Datasheet

ASI B


REBLOC 80XW_8

**Precast Concrete
Vehicle Restraint System**

**Permanent System
Free standing in front of rigid wall**

**Technical data**

Containment level	H2
Working width	W1 ($W_N \leq 0.6$ m) in combination with rigid wall
Impact severity level	ASI B
Vehicle intrusion	VI1 ($VI_N \leq 0.6$ m) in combination with rigid wall
Installation	free standing on asphalt concrete
Application	single-sided
Minimum installation length	32 m (4 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 36 x 80 cm
Weight/element	approx. 3300 kg
Curve radius	$r \geq 50$ m (inside of the curve) $r \geq 235$ m (outside of the curve)
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

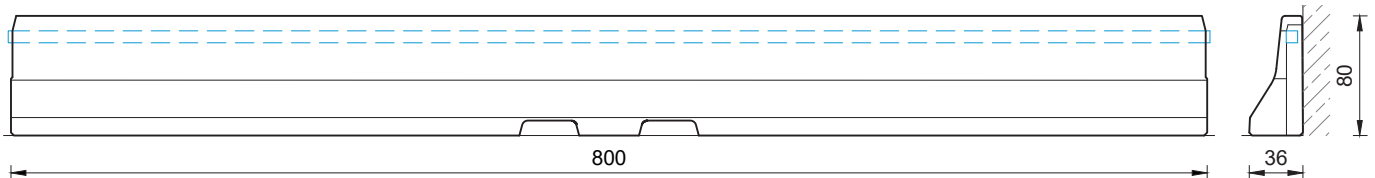

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com