RE N2 W4 ASI B

REBLOC 80L_4

Technical Datasheet

REBLOC 80L_4

Precast Concrete Vehicle Restraint System

Permanent System Free standing



Technical data

Containment level	**N2**
Working width	**W4 ($W_N \leq 1.3$ m)**
Impact severity level	**ASI B**
Installation	**free standing on asphalt | concrete**
Application	**single-sided | double-sided**
Minimum installation length	**68 m (17 elements) + initial/end anchorage**
Initial/end anchorage	**required (according to anchor chart 39-10501): e.g. REBLOC 80H_4T | 80H_7T or force closure**
Dimensions L x W x H in cm	**400 x 56 x 80 cm**
Weight/element	**approx. 1480 kg**
Curve radius	**r ≥ 55 m, smaller radii on request**
Coupling/exposed steel parts	**fully integrated, exposed parts hot-dip galvanized**
CE certification	✓

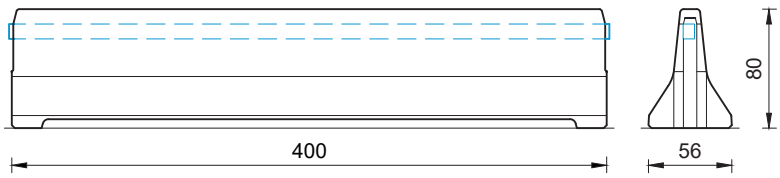

all dimensions in cm

Copyright and pictures: REBLOC, changes and misprints reserved.