

REBLOC 80SAQ_12


Technical Datasheet

ASI B

REBLOC 80SAQ_12


Precast Concrete
Vehicle Restraint System

Temporary System
Achored

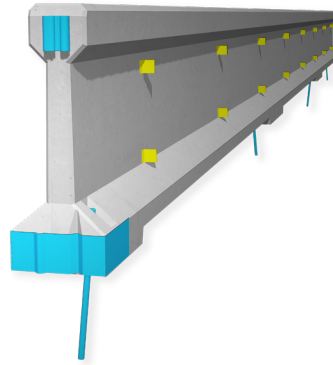

Technical data

Containment level	N2
Working width	W1 ($W_N \leq 0.6 \text{ m}$)
Impact severity level	ASI B
Installation	anchored (4x anchor pins RPIN20_480 in asphalt per element)
Application	single-sided double-sided
Minimum installation length	120 m (10 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 80 cm
Weight/element	approx. 2960 kg
Curve radius	$r \geq 260 \text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	✓

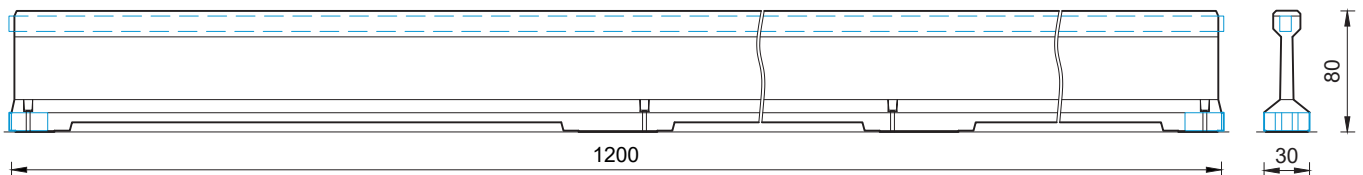

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com