

REBLOC 80SA_4


Technical Datasheet

ASI B

REBLOC 80SA_4


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

| | |
|------------------------------|---|
| Containment level | N2 |
| Working width | W4 ($W_N \leq 1.3 \text{ m}$) |
| Impact severity level | ASI B |
| Installation | free standing on asphalt concrete |
| Application | single-sided double-sided |
| Minimum installation length | 92,7 m (23 elements) + initial/end anchorage |
| Initial/end anchorage | required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure |
| Dimensions L x W x H in cm | 403 x 30 x 80 cm |
| Weight/element | ca. 1010 kg |
| Curve radius | $r \geq 87 \text{ m}$, smaller radii on request |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| Features | rubber pads in contact areas for protection of the road surface |
| CE certification | ✓ |

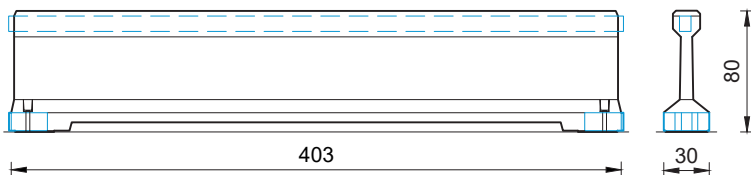

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com