

MINIBLOC 50C_2

Technical Datasheet

ASI A

MINIBLOC 50C_2


Precast Concrete Vehicle Restraint System

Securement of
urban and industrial areas
Free standing



Technical data

Containment level	T1
Working width	W1 ($W_N \leq 0.6$ m)
Impact severity level	ASI A
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	38 m (19 elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	200 x 40 x 50 cm
Weight/element	510 kg
Curve radius	$r \geq 16$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

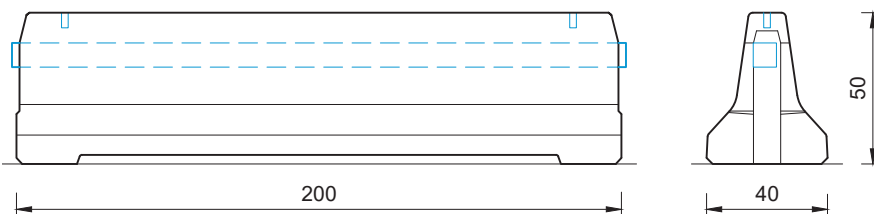

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com