


REBLOC 50H_12

Technical Datasheet

Precast Concrete
Vehicle Restraint System


Temporary System
Free standing



REBLOC 50H_12

Technical data

Containment level	T1	T3	T3
Working width	W1 ($W_N \leq 0.6$ m)	W1 ($W_N \leq 0.6$ m)	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI A	ASI A	ASI A
Installation	free standing on asphalt concrete		free standing on compacted gravel
Application	single-sided double-sided		
Minimum installation length	180 m (15 elements)		120 m (10 elements)
Initial/end anchorage	not necessary, optional available		required (according to anchor chart 39-10500): e.g. REBLOC 50H_2T or force closure
Dimensions L x W x H in cm	1200 x 24 x 50 cm		
Weight/element	approx. 1580 kg		
Curve radius	$r \geq 200$ m, smaller radii on request		
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized		
Features	rubber pads in contact areas for protection of the road surface		

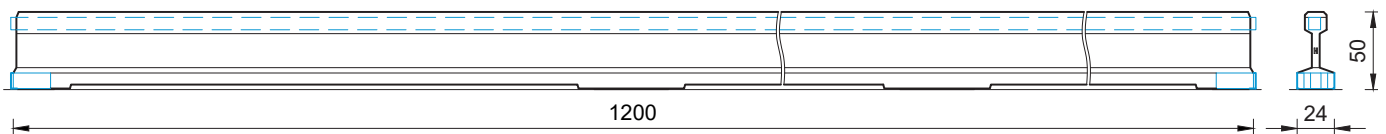

all dimensions in cm