


REBLOC 50_12

Technical Datasheet

Precast Concrete
Vehicle Restraint System


Temporary System
Free standing



REBLOC 50_12

Technical data

| | | |
|------------------------------|---|------------------------|
| Containment level | T1 | T3 |
| Working width | W1 ($W_N \leq 0.6$ m) | W2 ($W_N \leq 0.8$ m) |
| Impact severity level | ASI A | |
| Installation | free standing on asphalt concrete | |
| Application | single-sided double-sided | |
| Minimum installation length | 180 m (15 elements) | |
| Initial/end anchorage | not necessary, optional available | |
| Dimensions L x W x H in cm | 1200 x 24 x 50 cm | |
| Weight/element | approx. 1580 kg | |
| Curve radius | $r \geq 200$ m, smaller radii on request | |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized | |
| Features | rubber pads in contact areas for protection of the road surface | |

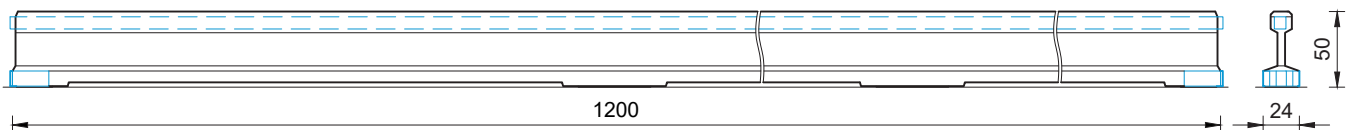

all dimensions in cm