


REBLOC 50H_12

Technical Datasheet


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	T1	T3
Working width	W1 ($W_N \leq 0.6$ m)	W1 ($W_N \leq 0.6$ m)
Impact severity level	ASI A	
Installation	free standing on asphalt concrete	
Application	single-sided double-sided	
Minimum installation length	180 m (15 elements)	
Initial/end anchorage	not necessary, optional available	
Dimensions L x W x H in cm	1200 x 24 x 50 cm	
Weight/element	approx. 1580 kg	
Curve radius	$r \geq 200$ m, smaller radii on request	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	
Features	rubber pads in contact areas for protection of the road surface	

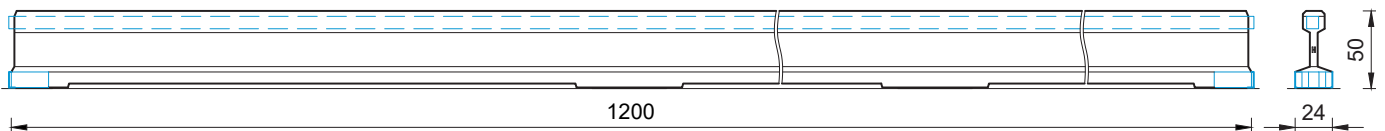

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com