

REBLOC 50H_4


Technical Datasheet

ASI A

REBLOC 50H_4


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	T3
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI A
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	68.5 m (17 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 50H_2T or force closure
Dimensions L x W x H in cm	403 x 24 x 50 cm
Weight/element	approx. 540 kg
Curve radius	$r \geq 65$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

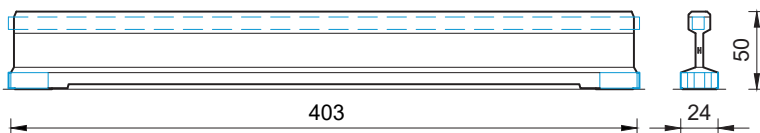

all dimensions in cm