


# REBLOC 50\_12

## Technical Datasheet


Precast Concrete  
Vehicle Restraint System

Temporary System  
Free standing



### Technical data

Containment level	T1	T3
Working width	W1 ( $W_N \leq 0.6$ m)	W2 ( $W_N \leq 0.8$ m)
Impact severity level	ASI A	
Installation	free standing on asphalt   concrete	
Application	single-sided   double-sided	
Minimum installation length	180 m (15 elements)	
Initial/end anchorage	not necessary, optional available	
Dimensions L x W x H in cm	1200 x 24 x 50 cm	
Weight/element	approx. 1560 kg	
Curve radius	$r \geq 200$ m, smaller radii on request	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	
Features	rubber pads in contact areas for protection of the road surface	

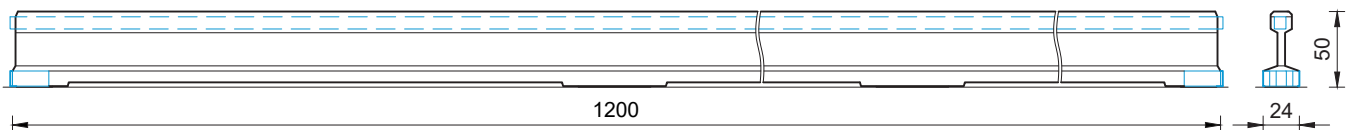

all dimensions in cm