

REBLOC 60H_12


Technical Datasheet

ASI A

REBLOC 60H_12


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	T3
Working width	W2 ($W_N \leq 0.8 \text{ m}$)
Impact severity level	ASI A
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	120 m (10 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 26 x 60 cm
Weight/element	approx. 2180 kg
Curve radius	$r \geq 200 \text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

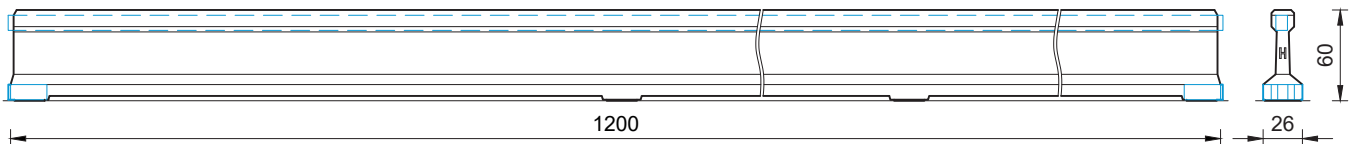

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com