

# REBLOC 80S\_4


## Technical Datasheet

ASI B

REBLOC 80S\_4


Precast Concrete  
Vehicle Restraint System

Temporary System  
Free standing



### Technical data

Containment level	T3
Working width	W2 ( $W_N \leq 0.8 \text{ m}$ )
Impact severity level	ASI B
Vehicle intrusion	VI2 ( $VI_N \leq 0.8 \text{ m}$ )
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	68.5 m (17 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure
Dimensions L x W x H in cm	403 x 30 x 80 cm
Weight/element	ca. 1010 kg
Curve radius	$r \geq 86 \text{ m}$ , smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

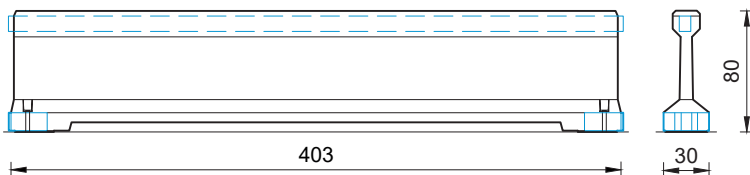

all dimensions in cm