


REBLOC 80XAS_8

Technical Datasheet

Precast Concrete
Vehicle Restraint System

Permanent System
Temporary System
Free standing


BEswitch

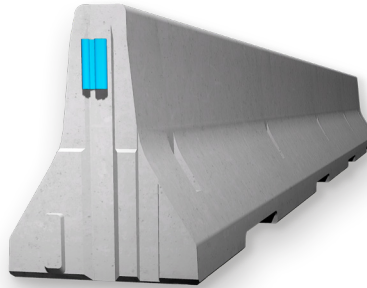

REBLOC 80XAS_8

Technical data

Containment level	T1	T3
Working width	W1 ($W_N \leq 0.6$ m)	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI A	ASI A
Vehicle intrusion	-	VI1 ($VI_N \leq 0.6$ m)
Installation	free standing on asphalt concrete	
Application	single-sided double-sided	
Minimum installation length	80 m (10 elements)	
Initial/end anchorage	not necessary, optional available	
Dimensions L x W x H in cm	800 x 59 x 80 cm	
Weight/element	approx. 4670 kg	
Curve radius	$r \geq 235$ m, smaller radii on request	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	

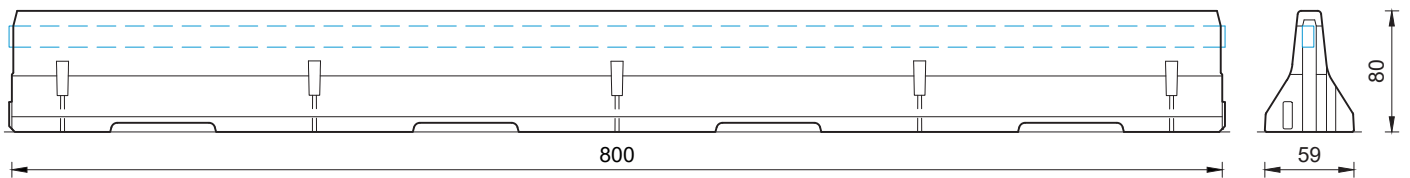

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com