

# REBLOC 85BF\_8

## Technical Datasheet

Precast Concrete  
Vehicle Restraint System

Permanent System  
Temporary System  
Free standing


BEswitch



REBLOC 85BF\_8

### Technical data

	T1	T3
Containment level	T1	T3
Working width	W1 ( $W_N \leq 0.6$ m)	W1 ( $W_N \leq 0.6$ m)
Impact severity level	ASI A	ASI A
Vehicle intrusion	-	VI1 ( $VI_N \leq 0.6$ m)
Installation	free standing on asphalt   concrete	
Application	single-sided	
Minimum installation length	80 m (10 elements)	
Initial/end anchorage	not necessary, optional available	
Dimensions L x W x H in cm	800 x 44 x 85 cm	
Weight/element	approx. 3870 kg	
Curve radius	$r \geq 225$ m, smaller radii on request	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	

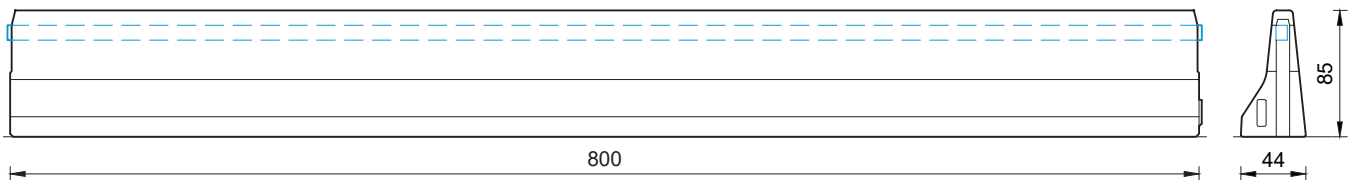

all dimensions in cm

### REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com