


**REFENCE 50H\_12+104.01**

Technical Datasheet

ASI A

**Precast Concrete  
Vehicle Restraint System  
with integrated Fence**


**Temporary System  
Free standing**

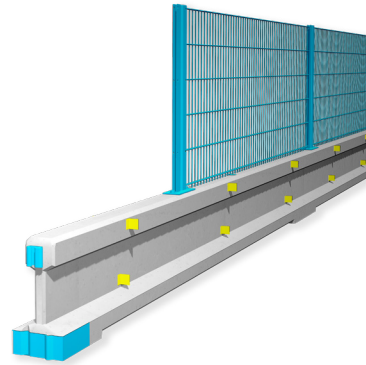

REFENCE 50H\_12+104.01

**Technical data**

Containment level	T3
Working width	W2 ( $W_N \leq 0.8$ m)
Impact severity level	ASI A
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	180 m (15 concrete elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 24 x 154 cm (height concrete element 50 cm + height top fence 104 cm)
Weight/element	1580 kg (concrete element)
Curve radius	$r \geq 200$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

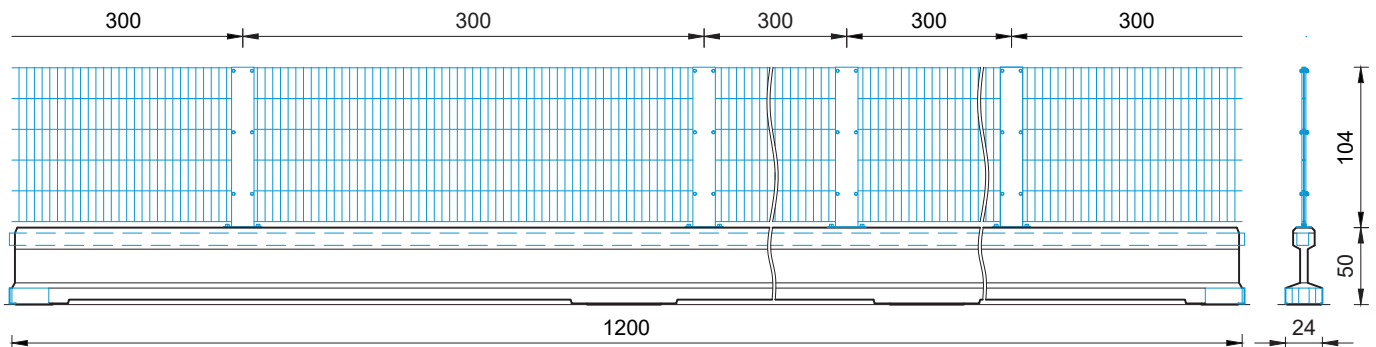

all dimensions in cm

**REBLOC GmbH**

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)