


REFERENCE 80S_12+104.01

Technical Datasheet

ASI B

**Precast Concrete
Vehicle Restraint System
with integrated Fence**


**Temporary System
Free standing**

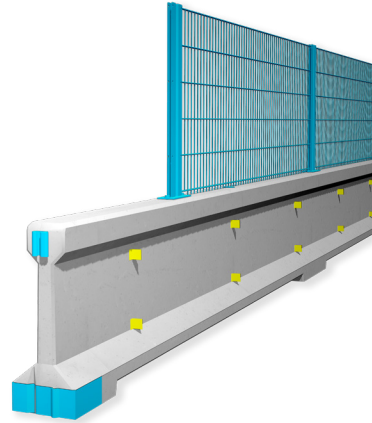

REFERENCE 80S_12+104.01

Technical data

Containment level	T3
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	180 m (15 concrete elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 184 cm (height concrete element 80 cm + height top fence 104 cm)
Weight/element	2980 kg (concrete element)
Curve radius	$r \geq 260$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

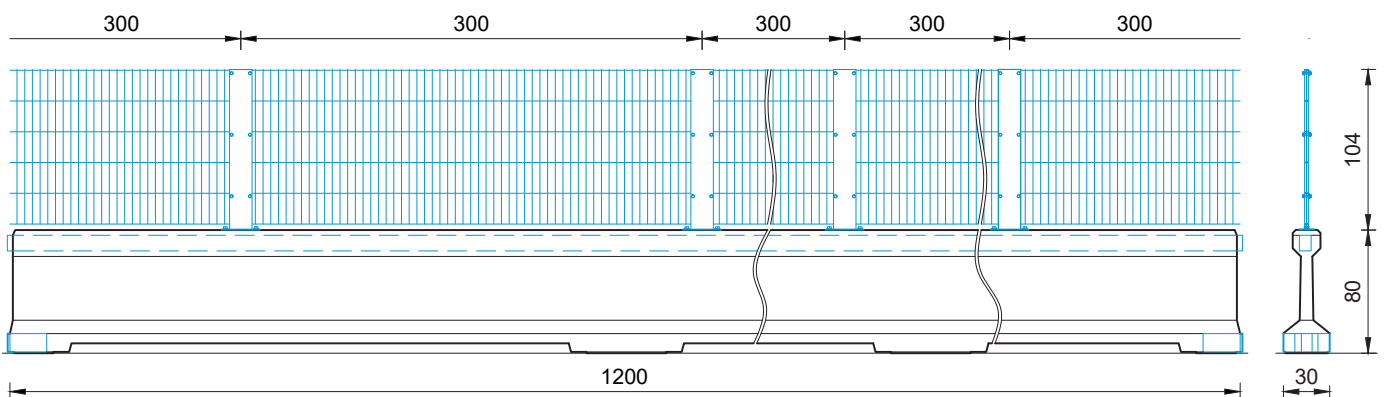

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com