

# TR F41 Eco-Safe 2.0

## ↔ REBLOC 84XEAL\_8

Technical Datasheet

ASI B

TR F41 Eco-Safe 2.0  
↔ REBLOC 84XEAL-8


### Transition for safety barriers

Steel guardrail  
↔ Precast Concrete Barrier  
Anchored



### Technical data

Containment level	H1
Working width	W4 ( $W_N \leq 1.3 \text{ m}$ )
Impact severity level	ASI B
Vehicle intrusion	VI6 ( $VI_N \leq 2.1 \text{ m}$ )
Barrier A	Saferoad Eco-Safe 2.0 H1/W4
Barrier B	REBLOC 84XEAL_8 H2/W1
Required elements	REBLOC 80XAS_3.5MS   80XAS_8MS
Installation   Weight REBLOC 80XAS_3.5MS	anchored on compacted gravel (per element 2 x anchor pins RPIN20_1280)   approx. 2220 kg
Installation   Weight REBLOC 80XAS_8MS	anchored on compacted gravel (per element 8 x anchor pins RPIN20_1280)   approx. 5120 kg
Length of transition	23 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

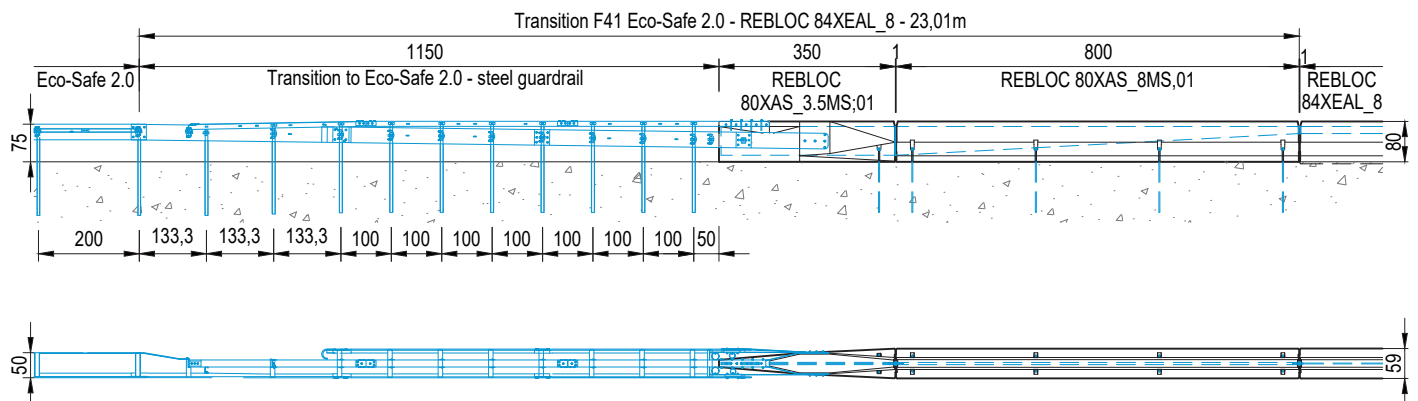

all dimensions in cm