

# TR F50 MegaRail sk

## ↔ REBLOC 120AS\_7.5


Technical Datasheet

ASI B

TR F50 MegaRail sk  
↔ REBLOC 120AS\_7.5


Transition for safety barrier

Steel guardrail  
↔ Precast Concrete Barrier  
Anchored

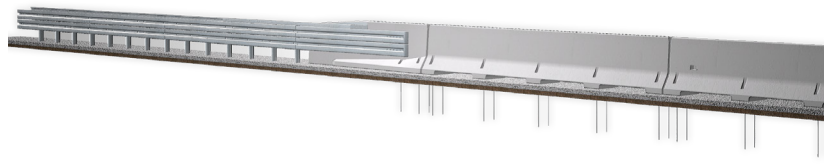

### Technical data

Containment level	H4b
Working width	W4 ( $W_N \leq 1.3$ m)
Impact severity level	ASI B
Vehicle intrusion	VI9 ( $VI_N > 3.5$ m)
Barrier A	Saferoad MegaRail sk H4b/W4 and H2/W2
Barrier B	REBLOC 120AS_7.5 H4b/W2
Required elements	REBLOC 120AS_4.6MSK   120AS_7.5MSK
Installation   Weight REBLOC 120AS_4.6MSK	anchored on compacted gravel (per element 4 x anchor pins RPIN20_1280)   approx. 3090 kg
Installation   Weight REBLOC 120AS_7.5MSK	anchored on compacted gravel (per element 10 x anchor pins RPIN20_1280)   approx. 6080 kg
Installation   Weight Steel guardrail	anchored on compacted gravel   approx. 433 kg
Length of transition	16.5 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

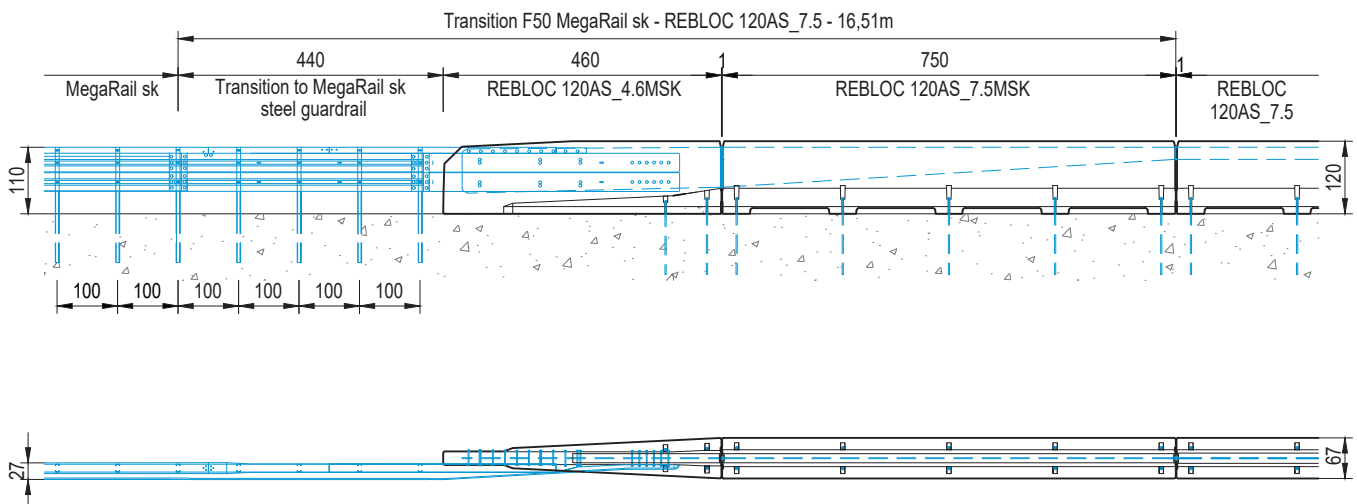

all dimensions in cm