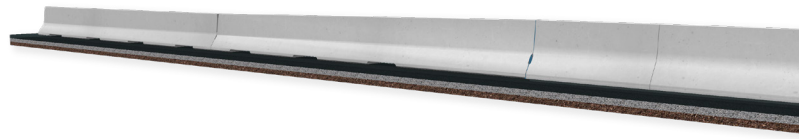


TR REBLOC 80H_8↔ **LT 205-12**

Technical Datasheet

ASI B


TR REBLOC 80H_8
↔ LT 205-12**Transition for safety barriers**

Precast Concrete Barrier
↔ **In-situ Concrete Barrier**

Free-standing ↔ **fixed in asphalt**

Technical data

Containment level	H2
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI2 ($VI_N \leq 0.8$ m)
Barrier A	REBLOC 80H_8, H2
Barrier B	LINETECH LT 205-12, H2
Required elements	REBLOC 80H_LB90_8L/R Reinforced in-situ concrete area with steel connection plate and stainless steel reinforcement
Installation Weight REBLOC 80H_LB90_8L/R	free-standing on asphalt approx. 5030 kg
Installation in-situ concrete area with steel connection plate	fixed in asphalt
Length of transition	10 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

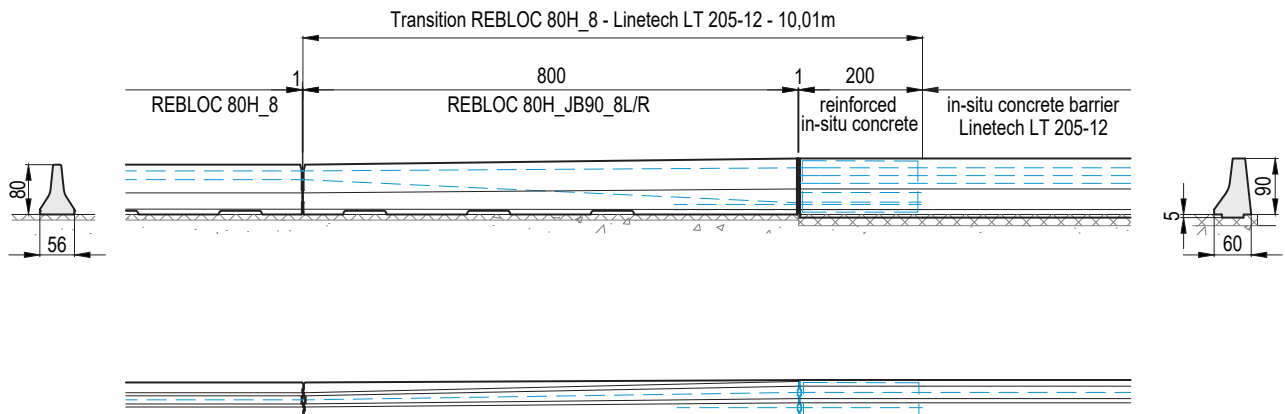

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com