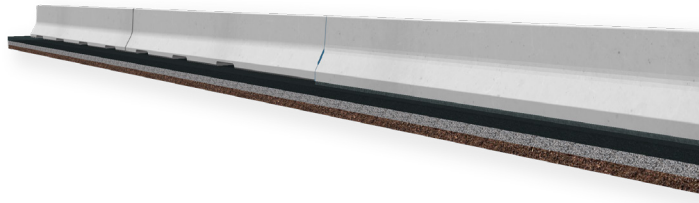


TR REBLOC 80H_8 ⇌ 84XEAL_8

Technical Datasheet

ASI B


TR REBLOC 80H_8
⇌
84XEAL_8**Transition for safety barriers**

Precast Concrete Barrier
⇌ **Precast Concrete Barrier**

Free-standing ⇌ **embedded in asphalt**

Technical data

Containment level	H2
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI2 ($VI_N \leq 0.8$ m)
Barrier A	REBLOC 80H_8 H2/W5
Barrier B	REBLOC 84XEAL_8 H2/W1
Required elements	REBLOC 80H_84XEAL_8L REBLOC 84XEAL_8R
Installation Weight REBLOC 80H_84XEAL_8L	free-standing approx. 4490 kg
Installation Weight REBLOC 84XEAL_8R	embedded in asphalt approx. 5410 kg
Length of transition	16 m
Application	single-sided double-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

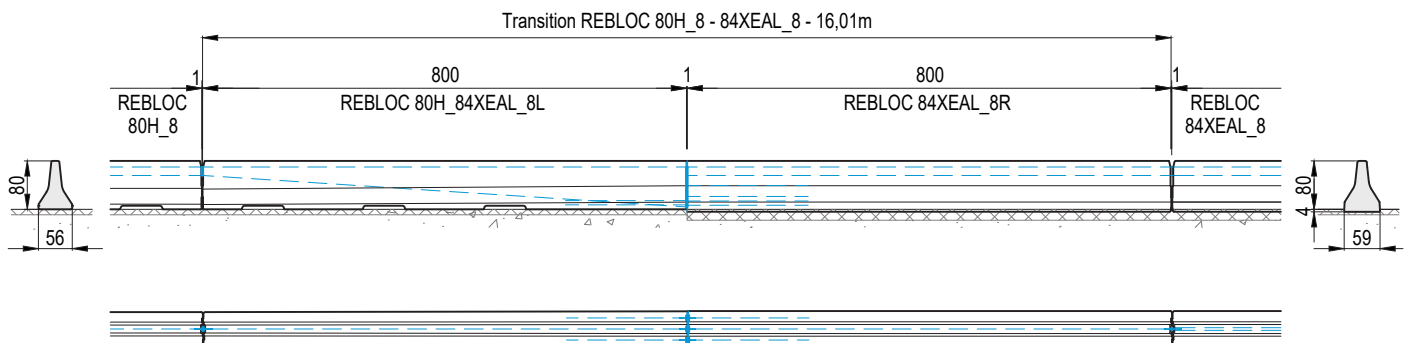

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com