

Vario Transition REBLOC 80H

Technical Datasheet

ASI B

Transition for safety barriers


Precast Concrete Barrier
↔ In-situ Concrete Barrier
Free standing



Vario Transition
REBLOC 80H

Technical data

| | |
|---|--|
| Containment level | H2 |
| Working width | W2 ($W_N \leq 0.8$ m) |
| Impact severity level | ASI B |
| Vehicle intrusion | VI2 ($V_{I_N} \leq 0.8$ m) |
| Barrier A | REBLOC 80H_8 H2/W5 |
| Barrier B | TSS Jerseybaer H2/W1 |
| Required elements | REBLOC 80H_JB90_8L/R |
| Installation Weight REBLOC 80H_8_JB90_8L/R | free standing approx. 5030 kg |
| Length of transition | 10 m |
| Application | single-sided |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |

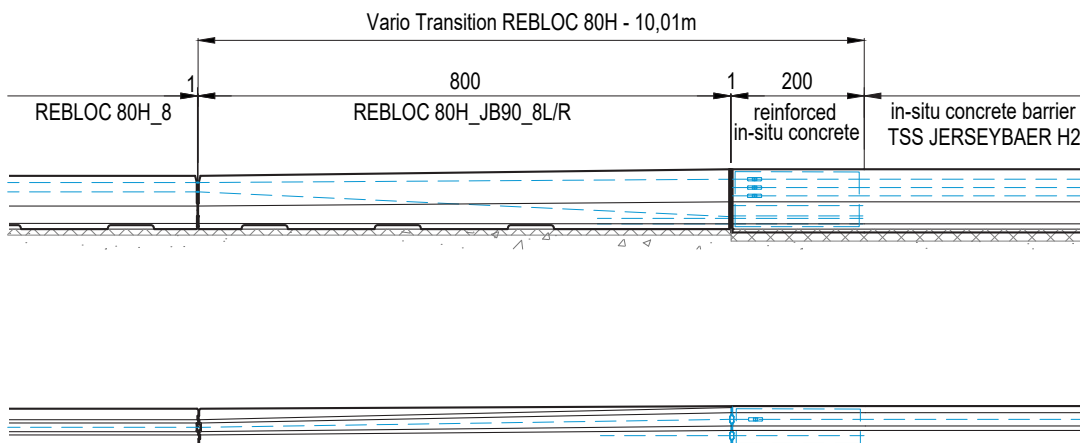

all dimensions in cm