


TR REBLOC 100_8 ↔ KB2 RH3

Technical Datasheet

ASI B

Vehicle restraint system


Transition
Precast Concrete Barrier
↔ steel guardrail
Free standing

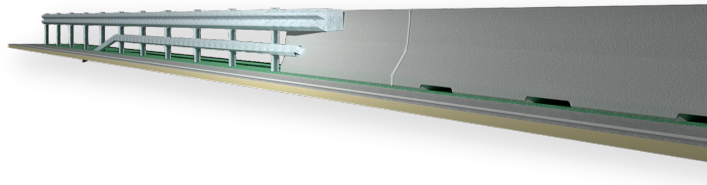

TR REBLOC 100-8
↔ KB2 RH3

Technical data

Containment level	H4b
Working width	W6 ($W_N \leq 2.1 \text{ m}$)
Impact severity level	ASI B
Vehicle intrusion	VI8 ($VI_N \leq 3.5 \text{ m}$)
Barrier A	REBLOC 100_8 H4b/W6
Barrier B	Voest KB2 RH3
Required elements	REBLOC 120_3.75VL/R 120_2.95VL/R 100_120_4V
Installation Weight REBLOC 120_3.75VL/R	free standing approx. 3450 kg
Installation Weight REBLOC 120_2.95VL/R	free standing approx. 2910 kg
Installation Weight REBLOC 100_120_4V	free standing approx. 3450 kg
Length of transition	24.33 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

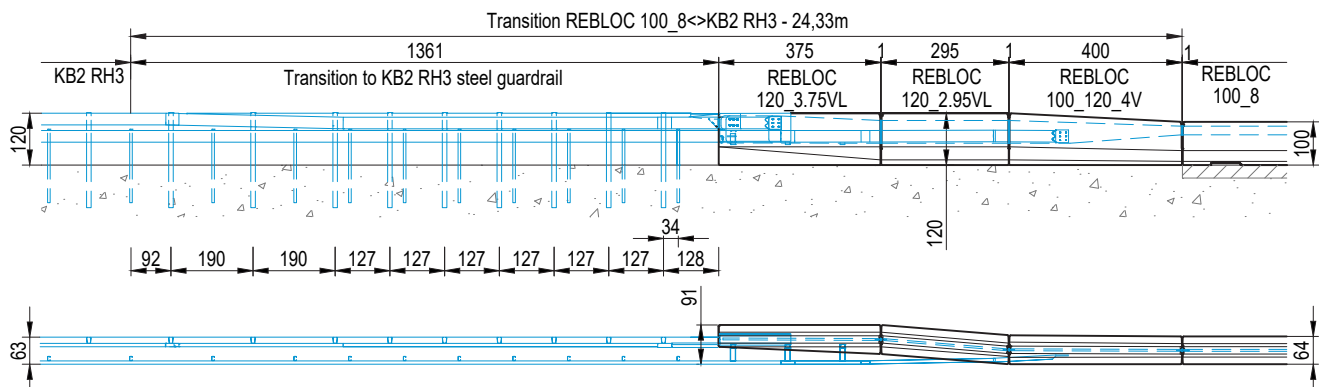

all dimensions in cm