


# TR REBLOC 80H\_8 ↔ KB2 RH2C

Technical Datasheet

ASI A

## Vehicle restraint system


Transition  
Precast Concrete Barrier  
↔ steel guardrail  
Free standing

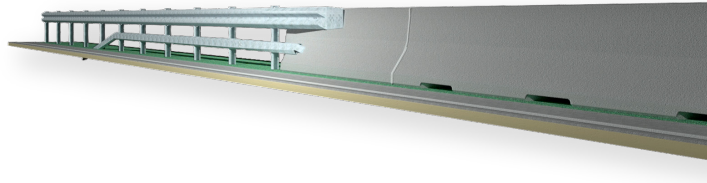

TR REBLOC 80H-8  
↔ KB2 RH2C

## Technical data

Containment level	H2
Working width	W5 ( $W_N \leq 1.7 \text{ m}$ )
Impact severity level	ASI A
Vehicle intrusion	VI5 ( $VI_N > 1.7 \text{ m}$ )
Barrier A	REBLOC 80H_8 H2/W5
Barrier B	Voest KB2 RH2C
Required elements	REBLOC 80X_3.75V   80X_80H_8V
Installation   Weight REBLOC 80X_3.75V	free standing   approx. 2280 kg
Installation   Weight REBLOC 80X_80H_8V	free standing   approx. 4400 kg
Length of transition	25.36 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

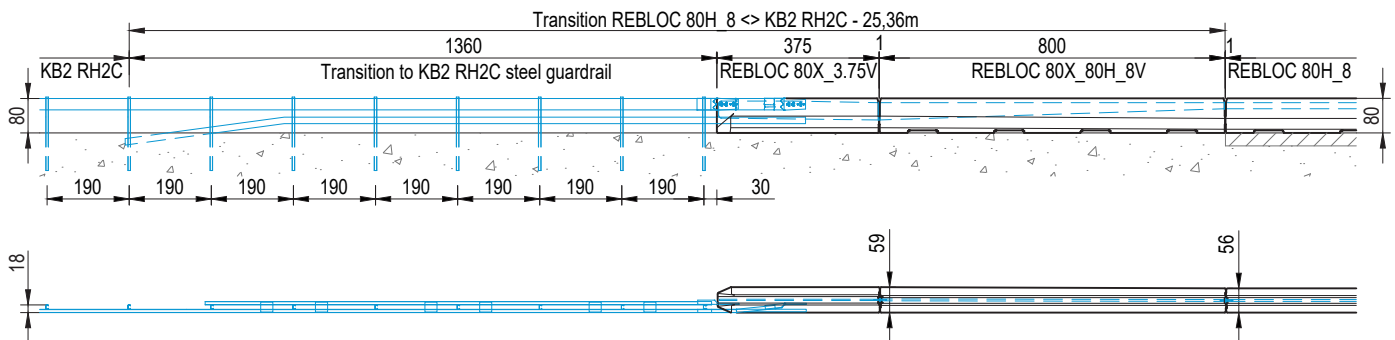

all dimensions in cm