

# REBLOC 100\_2


## Technical Datasheet

ASI B

REBLOC 100\_2


Precast Concrete  
Vehicle Restraint System

Permanent System  
Free standing

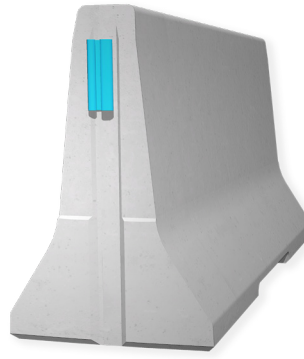

### Technical data

Containment level	L2 / H2
Working width	W5 ( $W_N \leq 1.7$ m)
Impact severity level	ASI B
Vehicle intrusion	VI5 ( $VI_N \leq 1.7$ m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	64 m (32 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 100_4T or force closure
Dimensions L x W x H in cm	200 x 64 x 100 cm
Weight/element	approx. 1500 kg
Curve radius	$r \geq 27$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

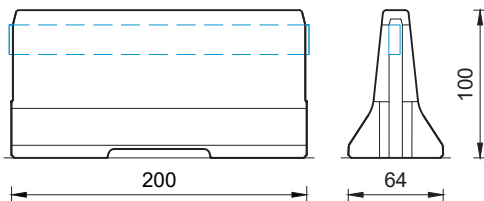

all dimensions in cm