

REBLOC 80AS_8


Technical Datasheet

ASI B

REBLOC 80AS_8


Precast Concrete
Vehicle Restraint System

Permanent System
Anchored

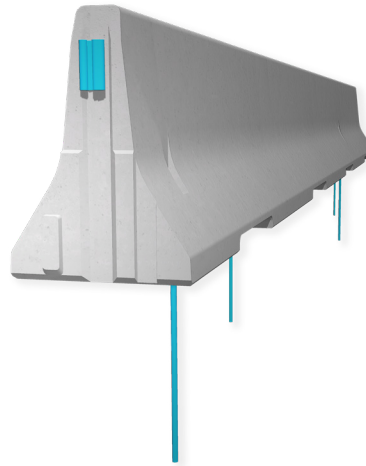

Technical data

Containment level	H2
Working width	W3 ($W_N \leq 1.0$ m)
Impact severity level	ASI B
Vehicle intrusion	VI3 ($VI_N \leq 1.0$ m)
Installation	anchored (4 x anchor pins RPIN20_1280 in compacted soil per element)
Application	single-sided double-sided
Minimum installation length	64 m (8 elements) + initial/end anchorage
Initial/end anchorage	required: e.g. REBLOC 80H_4T 80H_7T (2 x anchor pins RPIN20_1042 or 1280) or force closure
Dimensions L x W x H in cm	800 x 56 x 80
Weight/element	ca. 3920 kg
Curve radius	$r \geq 225$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

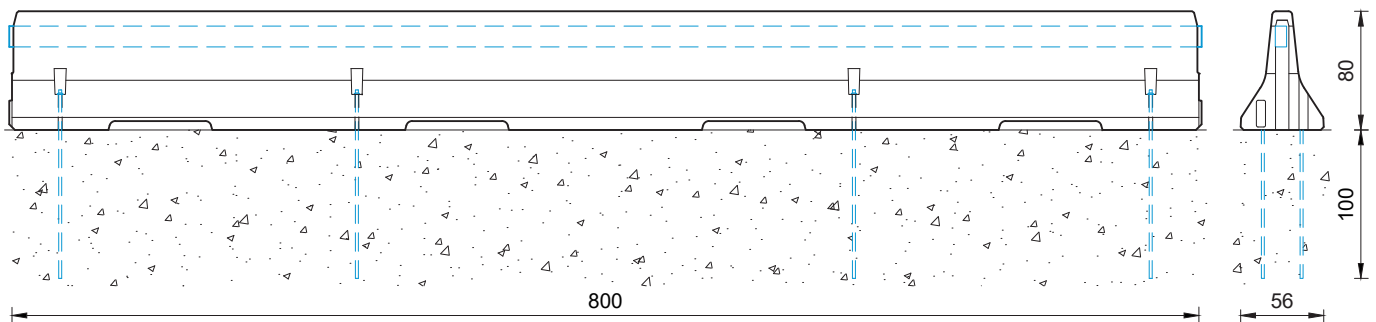

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com