

REBLOC 80H_8

Technical Datasheet


ASI A

REBLOC 80H_8

Precast Concrete
Vehicle Restraint System


Temporary System
Free standing

switch

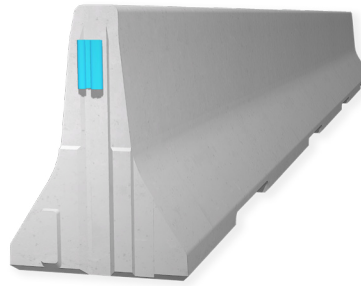

Technical data

Containment level	T3
Working width	W2 ($W_N \leq 0,8$ m)
Impact severity level	ASI A
Vehicle intrusion	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	80 m (10 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 56 x 80
Weight/element	approx. 4060 kg
Curve radius	$r \geq 225$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts

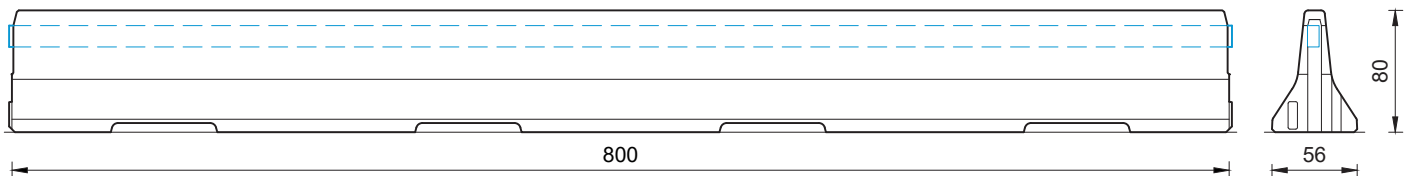

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com