

REBLOC 80SA_4


Technical Datasheet

ASI B

REBLOC 80SA_4


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	T3
Working width	W2 ($W_N \leq 0.8 \text{ m}$)
Impact severity level	ASI B
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	68.5 m (17 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure
Dimensions L x W x H in cm	403 x 30 x 80 cm
Weight/element	approx. 1010 kg
Curve radius	$r \geq 87 \text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

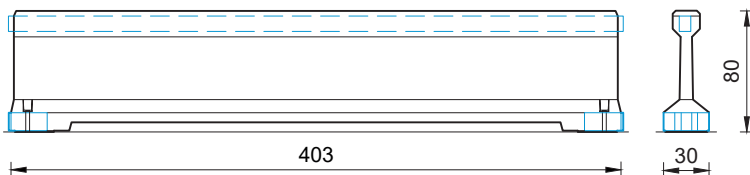

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com